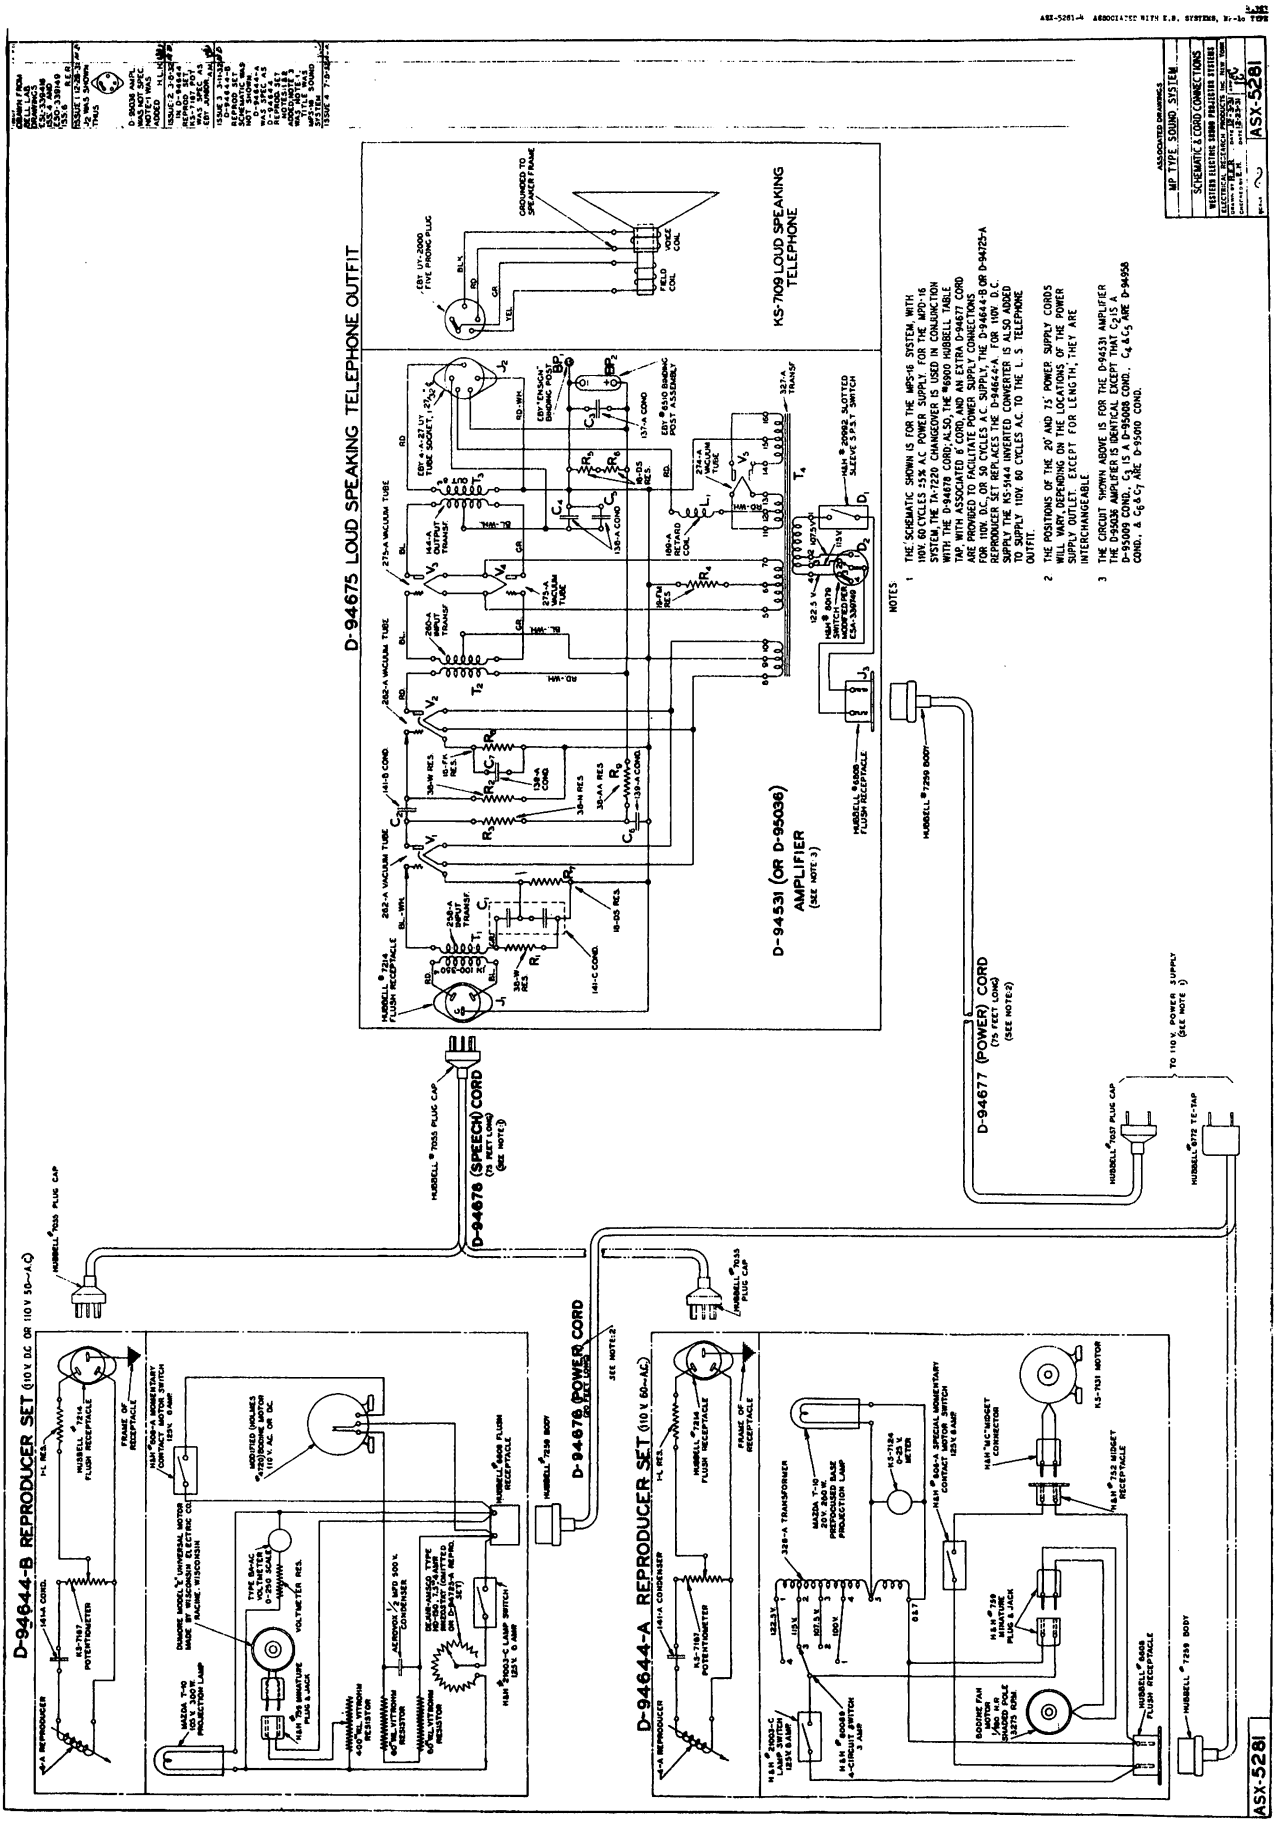
D-94644-B REPRODUCER SET (110 V DC OR 110 V 50—AC)
D-94644-A REPRODUCER SET (110 V, 60—AC)
D-94675 LOUD SPEAKING TELEPHONE OUTFIT
KS-7109 LOUD SPEAKING TELEPHONE
D-94531 (OR D-95036) AMPLIFIER (SEE NOTE 3)
D-94676 (SPEECH) CORD (75 FEET LONG) (SEE NOTE 1)
D-94678 POWER CORD (SEE NOTE 2)
D-94677 (POWER) CORD (75 FEET LONG) (SEE NOTE 2)
TO 110 V. POWER SUPPLY (SEE NOTE 1)
NOTES
1 THE SCHEMATIC SHOWN IS FOR THE MPS-16 SYSTEM WITH 110 V. 60 CYCLES ±5% A.C. POWER SUPPLY. FOR THE MPD-16 SYSTEM, THE TA-7220 CHANGEOVER IS USED IN CONJUNCTION WITH THE D-94678 CORD; ALSO, THE #6900 HUBBELL TABLE TAP, WITH ASSOCIATED 8' CORD, AND AN EXTRA D-94677 CORD ARE PROVIDED TO FACILITATE POWER SUPPLY CONNECTIONS FOR 110 V. DC, OR 50 CYCLES A.C. SUPPLY. THE D-94644-B OR D-94725-A REPRODUCER SET REPLACES THE D-94644-A. FOR 110 V. D.C. SUPPLY, THE KS-5444 INVERTED CONVERTER IS ALSO ADDED TO SUPPLY 110 V. 60 CYCLES A.C. TO THE L. S. TELEPHONE OUTFIT.
2 THE POSITIONS OF THE 20' AND 75' POWER SUPPLY CORDS WILL VARY, DEPENDING ON THE LOCATIONS OF THE POWER SUPPLY OUTLET. EXCEPT FOR LENGTH, THEY ARE INTERCHANGEABLE.
3 THE CIRCUIT SHOWN ABOVE IS FOR THE D-94531 AMPLIFIER THE D-95036 AMPLIFIER IS IDENTICAL EXCEPT THAT C_2 IS 15 A D-95009 COND., C_3 IS A D-95008 COND., C_4 & C_5 ARE D-94958 COND., & C_6 & C_7 ARE D-95010 COND.
ASSOCIATED DRAWINGS
MP TYPE SOUND SYSTEM
SCHEMATIC & CORD CONNECTIONS
ASX-5281